ENGLISH

@ SAFE 10/30 EI- OPERATING INSTRUCTIONS

✶ INTERFACE

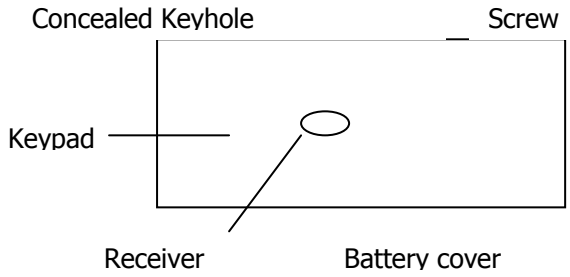

✶ OPERATING INSTRUCTIONS

Opening
Lean the electronic key (iB key) on the receptor or enter the code followed by #, the green light is on, open the safe.

Setting of the new code on the electronic key (iB key)
Unscrew the lock cover and remove the cover; push the button on the bottom of the board, after three "beep" lean the electronic key on the receiver; after one "beep" the new code is issued.
Note: only one master electronic card (iB key) is associated to a safe.

Setting of the digital code and closure
After every opening, you have to set a new code.
Leaving the door closed, insert a new code (1-9 numbers) followed by #; when the green light is on, the safe is closed.
Note: when you insert the new code, if you enter a wrong number, press * to cancel it and insert anew number.

✶ Functions

Batteries
If the green light blinks for about 8 seconds and the lock gives a continuous "beep"; batteries should be immediately replaced .

Safety code
The user can enter any number before the correct code and then press # to open the safe.

Warning function
When one wrong code is entered three times, the safe will give warning signals for 60 seconds and it will not operate. After 60 seconds, the safe will revert to its normal locked state.

Key override
Unscrew the screw and remove the battery cover, insert and turn the mechanical key to open the safe.

Batteries replacement
Remove the cover, replace the batteries with new ones (alkaline batteries 1,5 V).

✶ SPECIFICATIONS

DESCRIPTION	MODEL	DIMENSIONS	PACKAGE	WEIGHT
DIGITAL SAFE	@SAFE 10E	300 X 250 X 166	1 pc/carton	7 kg
DIGITAL SAFE	@SAFE 30E	430 X 370 X 220	1 pc/carton	16 kg

ENGLISH

Opening the safe and first setting of the iB key

Before installing the safe and the first time you have to set the iB key, follow these steps:

- ✓ remove the plastic film from the receiver;
- ✓ lean the iB key against the receiver; after one "beeps" the setting is finished. If in the future you would like to modify the code, please follow instructions on the user manual.